
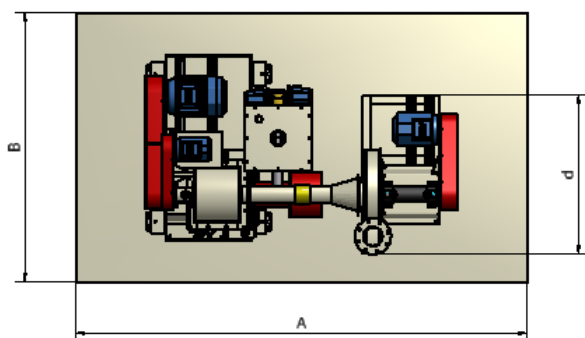
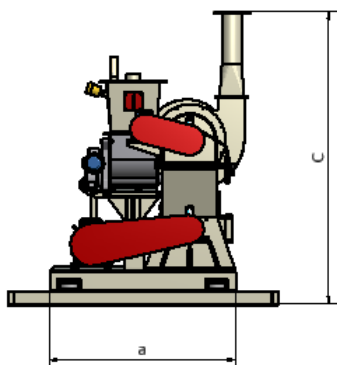


MG - B

for SODIUM SALTS GRINDING

Classifier mill - one rotor

Technical data

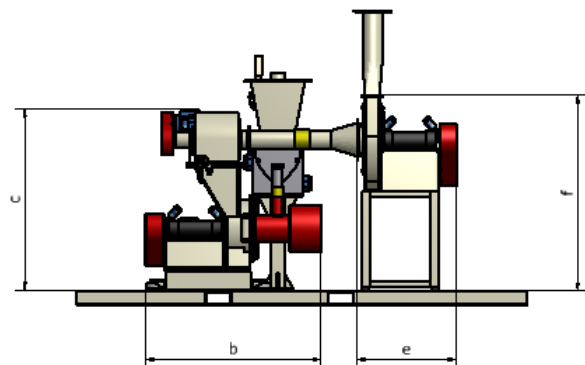

Classifier Mill			MG-B 30	MG-B 40	MG-B 60
Dimensions	a	mm	1070	1450	1600
Dimensions	b	mm	1120	1370	1430
Dimensions	c	mm	1250	1405	1790

Micro-dosing feeder

Hopper capacity	dm ³	80	80	80
Screw power	kW	0.75	0.75	0.75
Forced ventilation	kW	0.02	0.02	0.02
Blending tool power	kW	0.75	0.75	0.75

Fan

Dimensions	d	mm	1230	1245	1390
Dimensions	e	mm	670	775	815
Dimensions	f	mm	1450	1615	1545
Total pressure	mm/H ₂ O		500	600	900
Air volume	m ³ /h		720	1500	3000
Transport piping			DN 125	DN 150	DN 200

Standard base dimensions

A x B x C	mm	3000x2200 x2260	3500x2200 x2260	4500x2200 x2260
Weight with motors	kg	1800	1900	2600


Power supply

Grinder	kW	11	18.5 ÷ 22	30 ÷ 37
Classifier	kW	2.2	2.2	5.5
Fan	kW	5.5	7.5	15

NOMINAL OUTPUT

for Sodium Bicarbonate – (kg/h) min - max

Particle size	MG-B 30	MG-B 40	MG-B 60
D ₉₀ ≤ 35 μm	20 ÷ 200	50 ÷ 600	100 ÷ 1200
D ₉₀ ≤ 20 μm	120	300	600

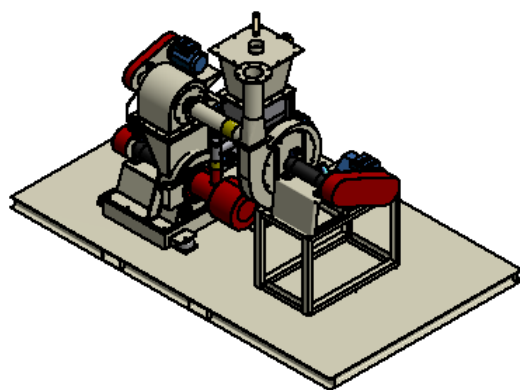

Mentioned data are just indicative. G.T.S. reserves itself the right to change weights, sizes and powers